

Pat nt Abstracts of Japan

PUBLICATION NUMBER : 06023791
PUBLICATION DATE : 01-02-94



APPLICATION DATE : 07-07-92
APPLICATION NUMBER : 04204449

APPLICANT : HIDA DENKI KK;

INVENTOR : KANNOU YUKIO;

INT.CL. : B29C 45/14 B29C 33/42 B29C 45/26
B29C 49/06 // B29L 24:00

TITLE : SYNTHETIC RESIN MOLDED ARTICLE
HAVING CUSHIONING PROPERTIES
AND ITS PRODUCTION

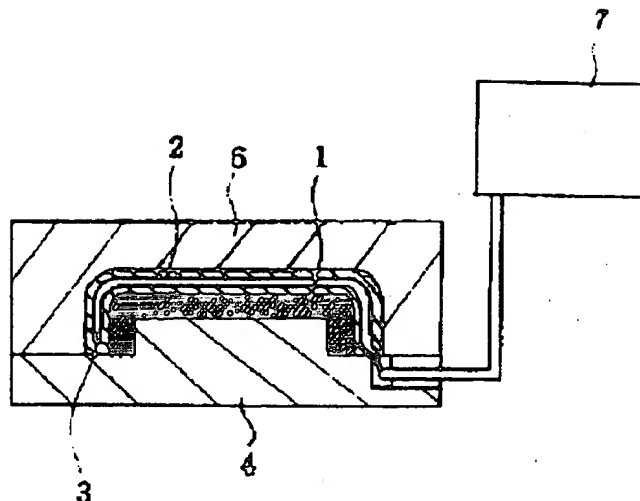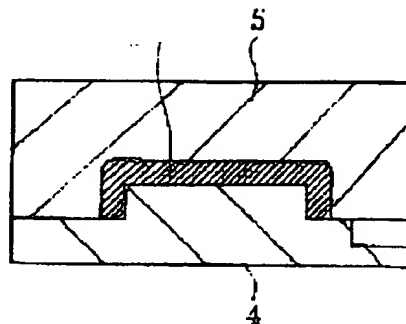

ABSTRACT : PURPOSE: To protect a structural part from impact and vibration by a cushioning power higher than a cushioning power in accordance with an intrinsic hardness of a synthetic resin by a method wherein a synthetic resin for a structural part and a synthetic resin for a cushioning part are integrally molded, and a hollow part is provided in the synthetic resin of the cushioning part.

CONSTITUTION: A structural part is molded out of a synthetic resin 1 by a common mold 4 and a mold 5 for forming the structural part. The mold 5 is removed, and the common mold 4 with the molded structural part held thereon is combined with a mold 6. A cushioning part is molded out of a synthetic resin 2 so as to be integral with the structural part. In the process of charging the synthetic resin 2 to be molded into the cushioning part, a high-pressure gas is injected for forming a hollow part 3.

COPYRIGHT: (C) JPO